



# CM-100 Thermoforming Machine

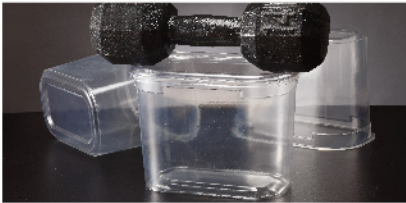




## ／ Feature ／

- ◎ Upper & Lower mold position drive by Servo Motor , precise control the stroke position.
- ◎ Prompt Changing Mold.
- ◎ Buffer design is adopted for the width of chain holder thus eliminating chain binding condition resulting from insufficient heating of sheet.
- ◎ Upper & Lower ceramic heater design , SSR and P.I.D. temperature control.
- ◎ F.C.D. casting is construction.
- ◎ PP 、 HIPS 、 OPS 、 PLA 、 PET 、 PVC 、 PE 、 ABS 、 PSP...etc various material are available for Food & Industrial packaging.
- ◎ PLC and color touch screen control.  
Allow 40 Modules memory.

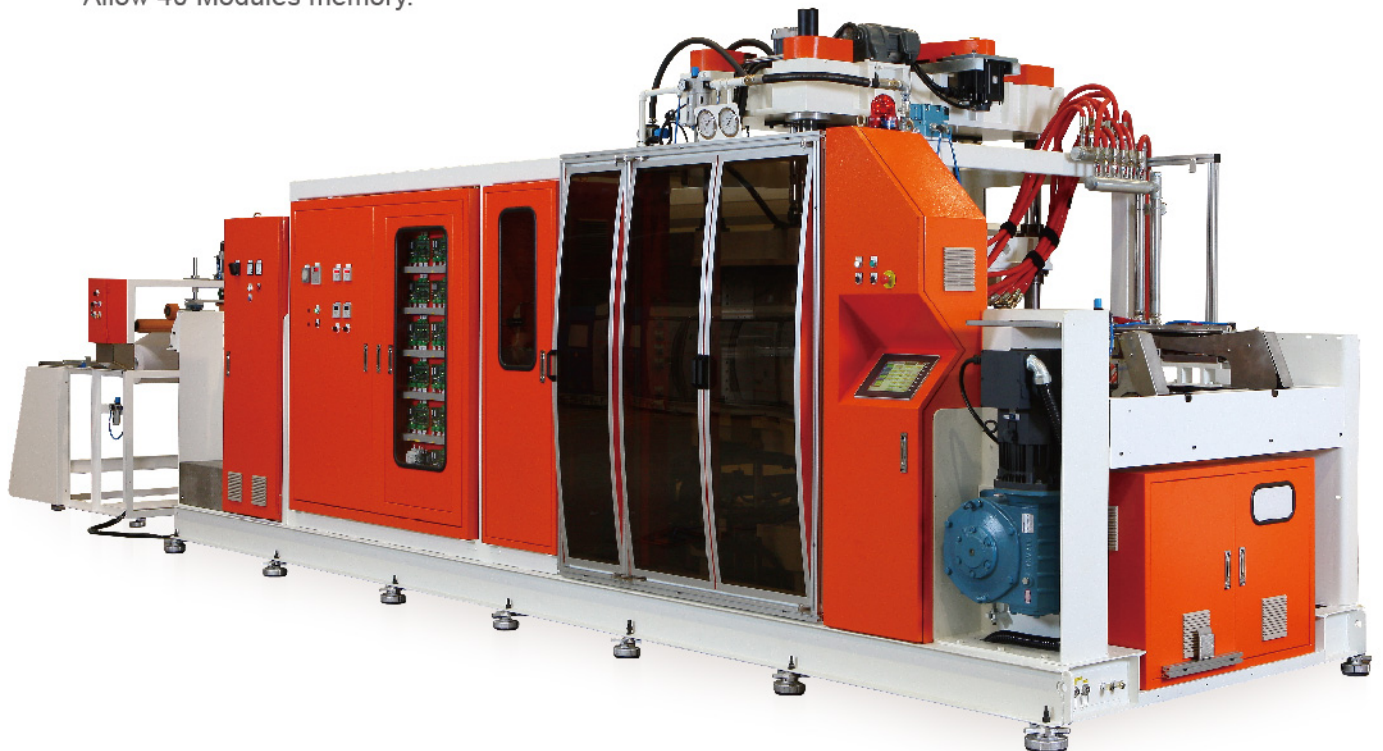

# CM-100 Thermoforming Machine

ITEM	SPECIFICATION
Vacuum Forming Area	Max: 1,000(W)×1,200(deliver)mm
Air Pressure Forming Area	Max: 1,000(W)×800(deliver)mm
Sheet thickness	0.2mm~2.0mm
Sheet Width	Max: 1,080mm, Min: 640mm
Forming Height	Max: 150mm
Mold Close Force	50 Tone
Forming Method	Air Pressure & Vacuum Forming
Operation Method	Fully automatic PLC and color touch screen control
Machine Dimension	7,700(L)×2,030(W)×3,000(H)mm
Machine Weight	13,000Kgs

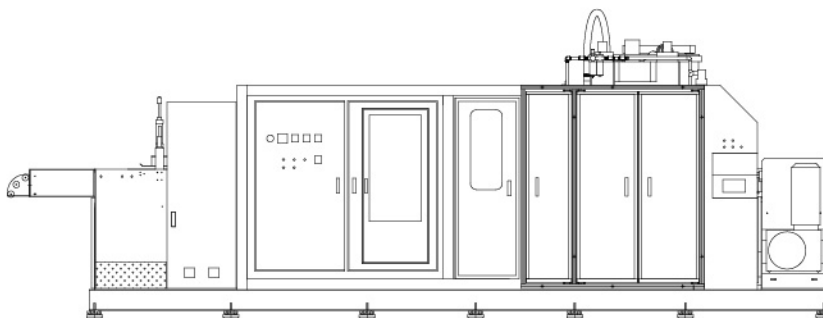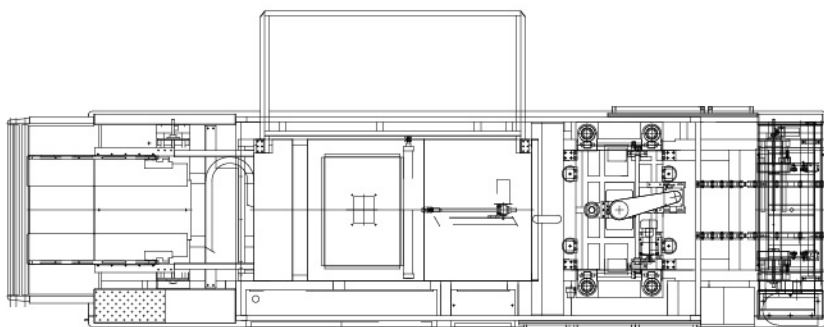

**承美機械有限公司**  
**CHENG MEI MACHINE CO., LTD.**

台灣省桃園縣大溪鎮大鶯路1619號  
 No. 1619, Daying Rd., Dasi Town, Taoyuan County,  
 Taiwan 33553  
 Tel: 886-3-307-6309 Fax: 886-3-390-9519  
 E-mail: cheng-meï@cheng-meï.com.tw  
 http://www.cheng-meï.com.tw