


**Rostfrei**  
Inox  
Stainless  
Steel

Installation space for e.g.  
ISO 4014 hexagon head screws  
and DIN 125 washers

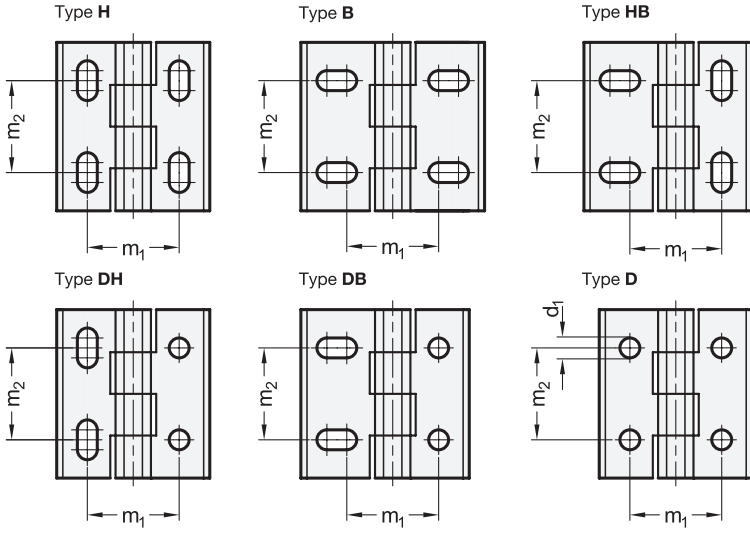

- 4 Type**
- H** horizontal adjustable
  - B** vertical adjustable
  - HB** vertical and/or horizontal adjustable
  - D** with through-holes
  - DH** with through-holes, horizontal adjustable
  - DB** with through-holes, vertical adjustable

2			3													4	
$l_1$	$l_2$	b	$d_1$	$d_2$	$h_1$	$h_2$	$h_3$	$h_4$	$l_3$	$l_4$	$m_1$	$m_2$					
D, DH, H	DB, HB, B								D, DH, H	DB, HB, B	D, DH, H, DB, HB, B						
40	45	50	45	5,3	5,3	4	13	5	9,5	19	16	21	16	21	25	25	
50	55	60	55	6,5	6,5	6	16,6	6	11,6	23,2	21	26	21	26	30	30	
60	68	76	65	8,3	8,3	8	21,4	8	14,9	29,8	26	33,5	26	33,5	36	36	

**Specification**

- Zinc die casting **ZD**
- plastic coated black, RAL 9005, textured finish **● SW**
- silver, RAL 9006, textured finish **● SR**
- Stainless Steel **NI**
- AISI CF-8
- matte shot-blasted **GS**
- Pin
- Stainless Steel AISI 316Ti
- *Stainless Steel characteristics* → Page 1489
- *RoHS-Konform*

**Accessory**

- St. Steel-Spacer plates GN 2370 → Page 961
- St. Steel-Plates with tapped holes GN 2372 → Page 960

**Information**

Hinges GN 235 are adjustable in height or width along the slots, depending on the design, and are fastened with hex-head, oval-head or cylinder screws with a low head.

Thanks to sufficient space (installation space) available for screw heads and washers, the hinges can be opened by 180° without collision.

The hinge drill pattern corresponds with that of the GN 237 hinge family, which allows the hinges to be exchangeable.

see also...

- *List of hinge types* → Page 956 ff.
- *Hinges GN 237* → Page 959 / 963

How to order		1	Material
		2	$l_1$
		3	$l_2$
		4	Type
		5	Finish

**GN 235-ZD-45-45-DB-SR**

3.1  
3.2  
3.3  
3.4  
3.5  
3.6  
3.7  
3.8  
3.9